Product Information ORUN-033

GUANGDONG ORUN PETROCHEMICAL CO., LTD
TEL: +86 757 81264752
Internet: http://www.terzo-tech.com
E-mail: info@terzo-tech.com

4T Motorcycle oil 10W40

Description

A new generation semi-synthetic engine oil for four-stroke motorcycles formulated with high quality mineral and synthetic base oils combined with special developed balanced additives to achieve the following properties:
- a high and stable viscosity index
- good cold start properties
- optimal friction characteristics
- a very strong protection against wear, corrosion and foaming
- a very good detergency and dispersion

Application


This oil is special developed for the lubrication of four-stroke motorcycles, so that sliding, sticking and/or rough changing of the clutch-plates no longer occurs. This oil is developed and tested in co-operation with the most important motorcycle producers and has its performance demonstrated in the field.

Specifications

Performance level:
API SN
JASO MA2
JASO MA

Typicals

Density at 20 °C, kg/l	0,858
Viscosity -25 °C, mPa.s	5744
Viscosity 40 °C, mm²/s	102,19
Viscosity 100 °C, mm²/s	14,06
Viscosity Index	158
Flash Point COC, °C	234
Pour Point, °C	-32
Total Base Number, mgKOH/g	7,8
Sulphate Ash, %	-

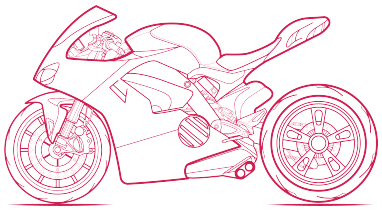

01/08/2024

The data mentioned in this product information sheet are meant to enable the reader to orient himself about the properties and possible applications of our products. Although this overview is composed with all possible carefulness on the stated date, the composer does not accept any liability for damages caused by incompleteness and/or inaccuracies in this information, especially when these are caused by obvious typing errors. The terms of delivery of the supplier apply to all product supplies. The reader is advised, specially for critical applications, to make the final product-choice in consultation with the supplier. Due to continual product research and development, the information contained herein is subject to changes without notification. You can download a recent material safety data sheet of this product on our website..